
# AKK AL B11.11 KBF 20 36 STTZN (372 340)



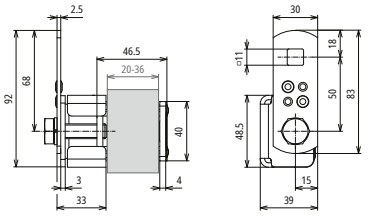


Dimension drawing

- Penetration of surface coatings up to 0.2 mm with blade or blade and screw.
- Suitable for use in Ex zone 2/22. All connections secured against self-loosening.

| **Type** | **AKK AL B11.11 KBF 20 36 STTZN** |
|---|---|
| **Part No.** | **372 340** |
| Clamping range | 20-36 mm |
| Material of clamp | **St/tZn** |
| Screw | M10 x 35 mm |
| Screw / spring washer material | **StSt** |
| Type of connection | Releasable connection |
| Penetration of surface protection | Up to 0.2 mm with blade or blade and screw |
| Connection with | Connection bracket |
| Connection bracket square hole | 11x11 mm |
| Lightning current carrying capability (10/350 µs) | $I_{imp}$ 50 kA $I_{imp}$ 100 kA *) |
| Standard | EN 62561-1 |

| **Masterdata** | |
|---|---|
| Net weight | 298.72 g/pc(s) |
| GTIN | 4013364520400 |
| PU | 1 pc(s) |
| Customs tariff number (Comb. Nomenclature EU) | 85359000 |

We reserve the right to make changes to the design and technology, dimensions, weights and materials in the interests of technical progress. The illustrations are not binding.