
AL ZF DUL 6.10 B5.2 6.5 L81 V2A (377 209)



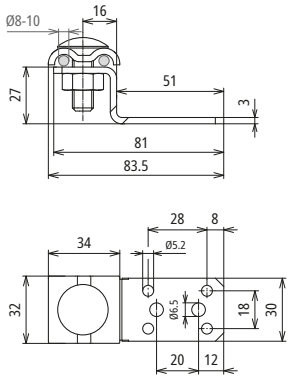

Dimension drawing

Type	AL ZF DUL 6.10 B5.2 6.5 L81 V2A
Part No.	**377 209**
Lug material	StSt
Material thickness (t1)	3 mm
Fixing	[4x] Ø5.2 / [2x] Ø6.5 mm
Fixing possibility	blind rivets or drilling screws
Application note	according to EN 62305-3 Suppl. 1 4 rivets Ø5mm, 2 rivets Ø6mm shall be used to connect materials ≥ 0.5mm thick or 2 Parker screws StSt Ø6.3mm for materials ≥ 2mm thick.
Material of double clamp	StSt
Screw	M10 x 30 mm
Material of screw / nut	StSt
Connection	lengthwise / crosswise
Connection with	double cleat
Clamping range Rd	8-10 mm
Lightning current carrying capability (10/350 µs)	limp 50 kA *)
Standard	EN 62561-1

Masterdata	
Net weight	111.65 g/pc(s)
GTIN	4013364525139
PU	1 pc(s)
Customs tariff number (Comb. Nomenclature EU)	85359000

We reserve the right to make changes to the design and technology, dimensions, weights and materials in the interests of technical progress. The illustrations are not binding.

*) For exact assignment, see test certificate.