

MVK 8.10 SKM10X35 V4A (390 079)

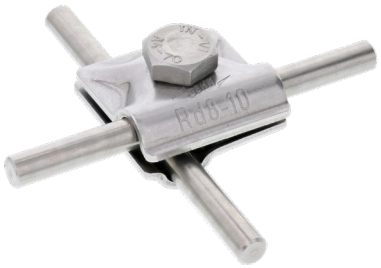

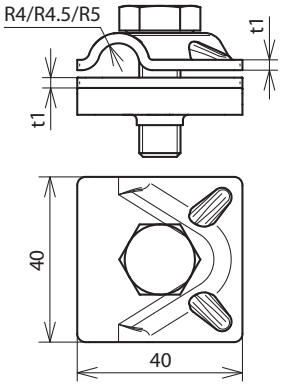

Dimension drawing

Clamp also suits for underground application.

Type	MVK 8.10 SKM10X35 V4A
Part No.	**390 079**
Material of clamp	StSt (V4A)
Material No. clamp	1.4571 / 1.4404 / 1.4401
ASTM / AISI clamp	316Ti / 316L / 316
Clamping range Rd	8-10 mm
Connection (solid / stranded)	35-70 mm²
Material thickness (t1 / t2)	2.5 mm
Screw	M10 x 35 mm
Material of screw / nut	StSt (V4A)
Material No. bolt / nut	1.4571 / 1.4404 / 1.4401
ASTM / AISI bolt / nut	316Ti / 316L / 316
Lightning current carrying capability (10/350 µs)	limp 100 kA *)
Standard	EN 62561-1
Short-circuit current (AC 50 Hz / DC) (1 s; ≤ 300 °C)	4.7 kA

Masterdata	
Net weight	96.4 g/pc(s)
GTIN	4013364128996
PU	1 pc(s)
Customs tariff number (Comb. Nomenclature EU)	85359000

We reserve the right to make changes to the design and technology, dimensions, weights and materials in the interests of technical progress. The illustrations are not binding.

*) For exact assignment, see test certificate.