
MVK 200 8.10 SKM10X30 V2A (390 209)



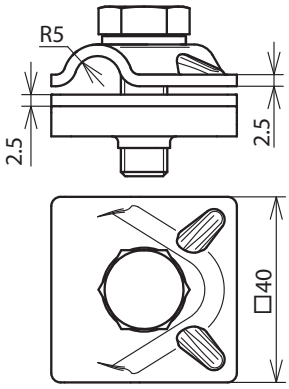

Dimension drawing

Multipurpose connecting clamp with spring washer for universal use as cross, T and parallel clamp; two-piece design. Tested for lightning current carrying capability up to 200 kA (10/350 µs).

Type	**MVK 200 8.10 SKM10X30 V2A**
Part No.	**390 209**
Material	StSt
Clamping range Rd / Rd	8-10 mm
Lightning current carrying capability (10/350 µs)	200 kA *)
Standard	based on EN 62561-1

Masterdata	
Net weight	103.5 g/pc(s)
GTIN	4013364158245
PU	1 pc(s)
Customs tariff number (Comb. Nomenclature EU)	85359000

We reserve the right to make changes to the design and technology, dimensions, weights and materials in the interests of technical progress. The illustrations are not binding.

*) For exact assignment, see test certificate.