

# MVK 8.10 SKM10X30 FSC V2A (390 559)

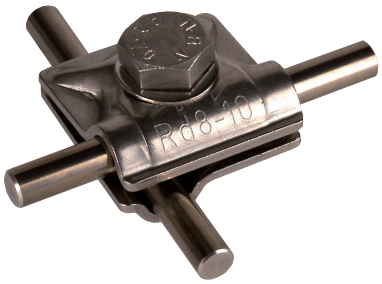

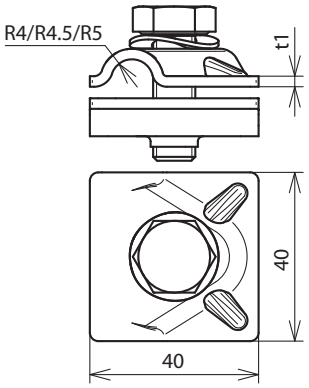


Dimension drawing

| Type | MVK 8.10 SKM10X30 FSC V2A |
|---|---|
| **Part No.** | **390 559** |
| Material of clamp | StSt |
| Clamping range Rd | 8-10 mm |
| Material thickness (t1 / t2) | 2.5 mm |
| Screw | M10 x 30 mm |
| Material of screw / nut | StSt |
| Lightning current carrying capability (10/350 µs) | 100 kA *) |
| Standard | EN 62561-1 |

| Masterdata | |
|---|---|
| Net weight | 98 g/pc(s) |
| GTIN | 4013364096035 |
| PU | 1 pc(s) |
| Customs tariff number (Comb. Nomenclature EU) | 85359000 |

We reserve the right to make changes to the design and technology, dimensions, weights and materials in the interests of technical progress. The illustrations are not binding.

*) For exact assignment, see test certificate.

© DEHN, Inc. • 500 S Main Street, Suite 115 • Mooresville, NC 28115 • United States • Tel. +1 877-927-6510 • contactDEHN@dehn.us • www.dehn.us

: Tested • NEU: New • !: Discontinued Model
: Cross connector • : Longitudinal connector • : Parallel connector • : T connector • : Clamp for parallel connector • : Clamp for T connector
: Pipe clamp for parallel connector • : Pipe clamp for T connector • : Equipotential bonding bar • : Bridging component