

MVK AR 8.10 SKM10X40 V4A (391 079)

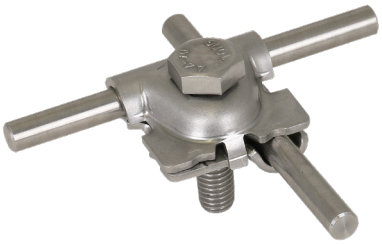

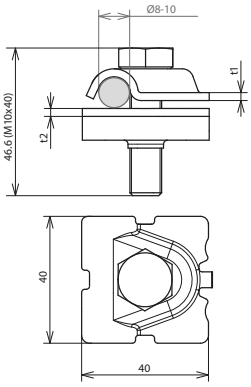

Dimension drawing

The locking lug is used to lock the MV clamp securely in a cross arrangement.

Type	MVK AR 8.10 SKM10X40 V4A
Part No.	**391 079**
Material of clamp	StSt (V4A)
Material No. clamp	1.4571 / 1.4404 / 1.4401
ASTM / AISI clamp	316Ti / 316L / 316
Clamping range Rd	8-10 mm
Clamping range (stranded / cable)	35-70 mm²
Material thickness (t1 / t2)	2.5 / 2.5 mm
Screw	M10 x 40 mm
Material of screw / nut	StSt (V4A)
Material No. bolt / nut	1.4571 / 1.4404 / 1.4401
ASTM / AISI bolt / nut	316Ti / 316L / 316
Lightning current carrying capability (10/350 µs)	I_{imp} 50 kA / I_{imp} 100 kA *)
Standard	EN 62561-1
Short-circuit current (AC 50 Hz / DC) (1 s; ≤ 300 °C)	9.8 *) kA

Masterdata	
Net weight	93.32 g/pc(s)
GTIN	4013364487130
PU	1 pc(s)
Customs tariff number (Comb. Nomenclature EU)	85359000

We reserve the right to make changes to the design and technology, dimensions, weights and materials in the interests of technical progress. The illustrations are not binding.

*) For exact assignment, see test certificate.