
Earthing Cables with Cable Lugs open / closed

EL10 L0.35M 1KSO 8.10 1KSG 8 (410403)



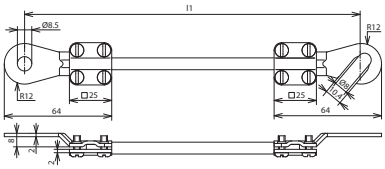

Dimension drawing

Type	EL10 L0.35M 1KSO 8.10 1KSG 8
Part No.	**410403**
Cable cross-section	10 mm²
Cable length (l1)	0.35 m
Cable lug open	M8 / M10
Cable lug closed	M8
Bore Ø	8.5 mm
Conductor	**Cu highly flexible**
Single wire diameter	0.1 mm
Operating voltage resistance (AC / DC)	600 V
Temperature range	-40 °C ... +150 °C
Colour	black ●
Material of the cable lug	**Cu/gal Sn**
Screw	M4 x 10 mm
Screw material	**St/gal Zn**

Masterdata	
Net weight	1 pc(s)/st
Customs tariff number (Comb. Nomenclature EU)	85444290
GTIN	4013364029194
PU	1 st

We reserve the right to make changes to the design and technology, dimensions, weights and materials in the interests of technical progress. The illustrations are not binding.

Packing in accordance with specifications of the VG standards (defence equipment standards) must be explicitly indicated when ordering.

© DEHN, Inc. • 500 S Main Street, Suite 115 • Mooresville, NC 28115 • United States • Tel. +1 877-927-6510 • contactDEHN@dehn.us • www.dehn.us

: Tested • NEU: New • !: Discontinued Model
: Cross connector • : Longitudinal connector • : Parallel connector • : T connector • : Clamp for parallel connector • : Clamp for T connector
: Pipe clamp for parallel connector • : Pipe clamp for T connector • : Equipotential bonding bar • : Bridging component