

# EL16 L1.55M 2KSG 10 (416 915)

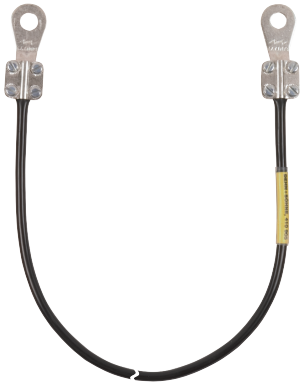



Dimension drawing

| Type | EL16 L1.55M 2KSG 10 |
|---|---|
| **Part No.** | **416 915** |
| Cable cross-section | 16 mm² |
| Cable length (l1) | 1.55 m |
| Cable lug closed | 2x M10 |
| Bore Ø | 10.5 mm |
| Conductor | Cu highly flexible |
| Operating voltage resistance (AC / DC) | 600 V |
| Temperature range | -40 °C ... +150 °C |
| Colour | black ● |
| Material of the cable lug | **Cu/gal Sn** |
| Screw | M4 x 10 mm |
| Screw material | **St/gal Zn** |
| Standard | EN 62561-1 |

| Masterdata | |
|---|---|
| Net weight | 365 g/pc(s) |
| GTIN | 4013364028982 |
| PU | 1 pc(s) |
| Customs tariff number (Comb. Nomenclature EU) | 85444290 |

We reserve the right to make changes to the design and technology, dimensions, weights and materials in the interests of technical progress. The illustrations are not binding.

Packing in accordance with specifications of the VG standards (defence equipment standards) must be explicitly indicated when ordering.