
Connection and bridging Device for Reinforcements

UES 16 L1000 VK RD8 28 FL30 EFP (416950)



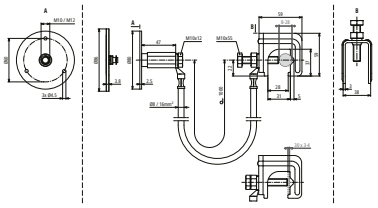

Dimension drawing

Connection device consisting of connecting cable with connected connecting clamp and fixed earthing terminal.

NEW

Type	UES 16 L1000 VK RD8 28 FL30 EFP
Part No.	**416950**
Connecting clamp material	**St/bare**
Clamping range Rd connecting clamp	8-28 mm
Clamping range Fl connecting clamp	30 x 3-4 mm
Screw Connecting clamp	M10 x 55 mm
Fixed earthing terminal material	**StSt (V4A)**
Fixed earthing point terminal thread	M10 / M12
Bridging cable material	Flexible copper conductor, frost-resistant
Bridging cable cable length	1000 mm
Bridging cable cable cross section	16 mm²
Cable lug Bridging cable	M10 / **Cu/galSn**
Lightning current carrying capability (10/350 µs)	I_{imp} 100 kA *)
Standard	EN 62561-1
Short-circuit current (AC 50 Hz / DC) (1 s; ≤ 300 °C)	3.1 kA

Masterdata	
Net weight	1 pc(s)/st
Customs tariff number (Comb. Nomenclature EU)	85359000
GTIN	4013364508620
PU	25 st

We reserve the right to make changes to the design and technology, dimensions, weights and materials in the interests of technical progress. The illustrations are not binding.

Special lengths possible on request.
*) For exact assignment, see test certificate.