

UTK 8.10 FL30 ZP V2A (459 139)

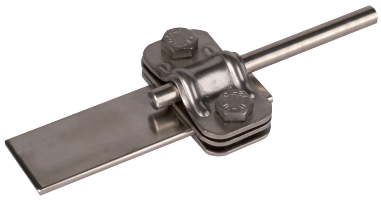

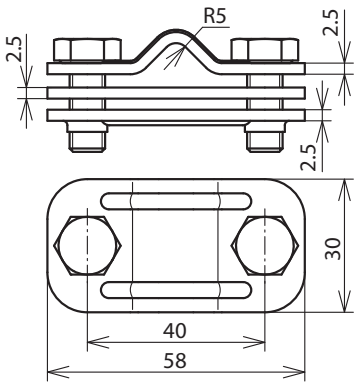

Dimension drawing

Type	UTK 8.10 FL30 ZP V2A
Part No.	**459 139**
Material	StSt
Clamping range Rd / Fl	8-10 / 30 mm
Screw	M8 x 20 mm
Screw material	StSt
Distance of screws	40 mm
Material thickness (t1)	2.5 mm
Lightning current carrying capability (10/350 µs)	I_{imp} 100 kA / I_{imp} 50 kA *)
Standard	EN 62561-1

Masterdata	
Net weight	122 g/pc(s)
GTIN	4013364078628
PU	1 pc(s)
Customs tariff number (Comb. Nomenclature EU)	85359000

We reserve the right to make changes to the design and technology, dimensions, weights and materials in the interests of technical progress. The illustrations are not binding.

*) For exact assignment, see test certificate.

© DEHN, Inc. • 500 S Main Street, Suite 115 • Mooresville, NC 28115 • United States • Tel. +1 877-927-6510 • contactDEHN@dehn.us • www.dehn.us

: Tested • NEU: New • !: Discontinued Model
: Cross connector • : Longitudinal connector • : Parallel connector • : T connector • : Clamp for parallel connector • : Clamp for T connector
: Pipe clamp for parallel connector • : Pipe clamp for T connector • : Equipotential bonding bar • : Bridging component