
Clamps for Ex Zone 2/22

UTK 200 2X10 FL30 ZP V2A (459200)



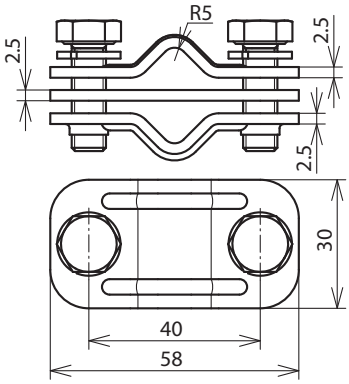

Dimension drawing

Disconnecting clamp with spring washer for connecting air-termination rod and conductor or down conductor and earth entry rod. Tested for lightning current carrying capability up to 200 kA (10/350 µs).

Type	UTK 200 2X10 FL30 ZP V2A
Part No.	**459200**
Material	StSt
Clamping range Rd / Rd	8-10 / 8-10 mm
Clamping range Rd / Fl	8-10 / 30 mm
Lightning current carrying capability (10/350 µs)	I_{imp} 200 kA *)
Standard	based on EN 62561-1

Masterdata	
Net weight	1 pc(s)/st
Customs tariff number (Comb. Nomenclature EU)	85359000
GTIN	4013364155527
PU	1 st

We reserve the right to make changes to the design and technology, dimensions, weights and materials in the interests of technical progress. The illustrations are not binding.

*) For exact assignment, see test certificate.