
UTK 200 8.10 16 ZP V2A (459 219)



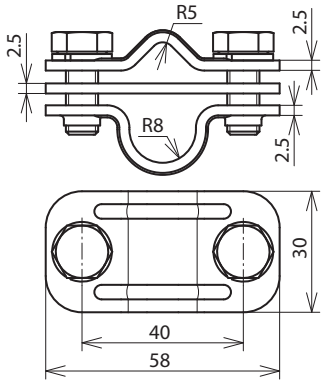

Dimension drawing

Disconnecting clamp with spring washer for connecting air-termination rod and conductor or down conductor and earth entry rod. Tested for lightning current carrying capability up to 200 kA (10/350 µs).

Type	**UTK 200 8.10 16 ZP V2A**
Part No.	**459 219**
Material	StSt
Clamping range Rd / Rd	8-10 / 16 mm
Lightning current carrying capability (10/350 µs)	I_{imp} 200 kA *)
Standard	based on EN 62561-1

Masterdata	
Net weight	126 g/pc(s)
GTIN	4013364158221
PU	1 pc(s)
Customs tariff number (Comb. Nomenclature EU)	85359000

We reserve the right to make changes to the design and technology, dimensions, weights and materials in the interests of technical progress. The illustrations are not binding.

*) For exact assignment, see test certificate.