
PAS 6AP M8 M10 KSM10 V4A (472 245)



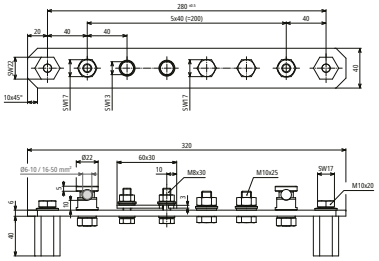

Dimension drawing

Type	PAS 6AP M8 M10 KSM10 V4A
Part No.	**472 245**
Number of terminals	6
Connections	2x KS connector, 1x lug for 30-mm flat conductor, 2x M10 screw connection
Material	StSt (V4A)
Material No.	1.4571 / 1.4404 / 1.4401
Dimensions (l x b x t1)	320 x 40 x 6 mm
Cross section	240 mm²
Short-circuit current (AC 50 Hz / DC) (1 s; ≤ 300 °C)	8.9 kA
Screw	M10 x 25 mm
Clamping range KS connector Rd.	6-10 mm
Approval	As per VG96953
Military designation	VG96953T07D

Masterdata	
Net weight	1.11 kg/pc(s)
GTIN	4013364449268
PU	1 pc(s)
Customs tariff number (Comb. Nomenclature EU)	85359000

We reserve the right to make changes to the design and technology, dimensions, weights and materials in the interests of technical progress. The illustrations are not binding.