

Non-sparking, Ex equipotential bonding bar for hazardous areas of zones 1/21, 2/22

PAS EX CC (472497)

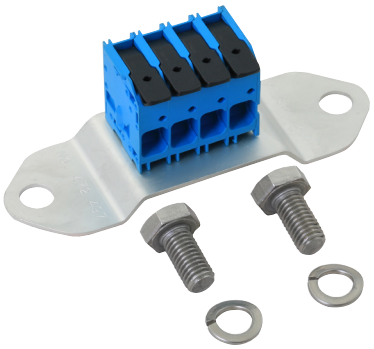

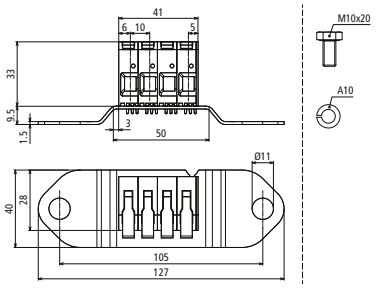

Dimension drawing

Push-in adapter for non-sparking, Ex equipotential bonding bar PAS EX for convenient connection of flexible conductors. For use in potentially explosive areas of Ex zones 1 and 2 (gases, vapours, mists) up to explosion group IIC as well as Ex zones 21 and 22 (dusts). Use indoors only permissible.

Type	**PAS EX CC**
Part No.	**472497**
Screw / spring washer material	StSt
Connecting clamp material	Polyamide
Fixing plate material	**Cu/gal (Ni)Sn**
Screws	M10 x 20 mm
Screw type	with spring washer
Lightning impulse current (10/350 µs) Cu 4-16 mm² (per core)	3 kA (non-sparking)
Lightning impulse current (10/350 µs) Cu 16 mm² (per core)	25 kA
Nominal discharge current (8/20 µs) per line (I_n) Cu 4-10 mm²	10 kA (non-sparking)
Nominal discharge current (8/20 µs) per line (I_n) Cu 16 mm²	15 kA (non-sparking)

Masterdata	
Net weight	174 g/pc(s)
Customs tariff number (Comb. Nomenclature EU)	85359000
GTIN	4013364470484
PU	1 pc(s)

We reserve the right to make changes to the design and technology, dimensions, weights and materials in the interests of technical progress. The illustrations are not binding.

Note: Non-sparking only ensured in connection with PAS EX ...!