
# Fixed Earthing Terminals

## EFPM M10 12 V4A L245 VP V2A (478049)



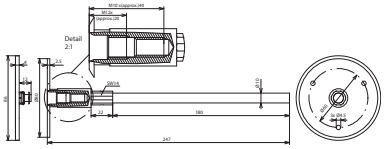

Dimension drawing

| Type | EFPM M10 12 V4A L245 VP V2A |
|---|---|
| **Part No.** | **478049** |
| Connection thread | M10 / M12 |
| Material of plate | StSt (V4A) |
| Material No. | 1.4571 / 1.4404 / 1.4401 |
| ASTM / AISI | 316Ti / 316L / 316 |
| Material of shaft | StSt |
| Dimensions of connecting shaft (Ø / length) | 10 / 180 mm |
| Minimum lengths of M10 screws | 35 mm (thread length 40 mm) |
| Minimum lengths of M12 screws | 15 mm (thread length 20 mm) |
| Short-circuit current (AC 50 Hz / DC) (1 s; ≤ 300 °C) | 3.3 kA |
| Lightning current carrying capability (10/350 µs) | $I_{imp}$ 100 kA |
| Standard | EN 62561-1 |
| Approvals | UL 467 |

| Masterdata | |
|---|---|
| Net weight | 1 pc(s)/st |
| Customs tariff number (Comb. Nomenclature EU) | 85359000 |
| GTIN | 4013364105164 |
| PU | 25 st |

We reserve the right to make changes to the design and technology, dimensions, weights and materials in the interests of technical progress. The illustrations are not binding.

Part No. 478 049 with UL approval.