
Fixed Earthing Terminals

EFPM M10 12 V4A WS L245 VP STTZN (478051)



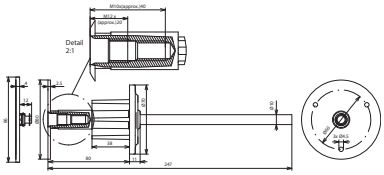

Dimension drawing

Protection against water ingress along the shaft into the wall (tested according to EN 62561-5 with 5 bar compressed air and 1 bar pressure water). Suitable for waterproof concrete.

Type	**EFPM M10 12 V4A WS L245 VP STTZN**
Part No.	**478051**
Connection thread	M10 / M12
Material of plate	StSt (V4A)
Material No.	1.4571 / 1.4404 / 1.4401
ASTM / AISI	316Ti / 316L / 316
Material of shaft	**St/tZn**
Dimensions of connecting shaft (Ø / length)	10 / 155 mm
Material of water barrier	**PVC**
Minimum lengths of M10 screws	35 mm (thread length 40 mm)
Minimum lengths of M12 screws	15 mm (thread length 20 mm)
Short-circuit current (AC 50 Hz / DC) (1 s; ≤ 300 °C)	3.7 kA
Lightning current carrying capability (10/350 µs)	I_{imp} 100 kA
Standard	EN 62561-1

Masterdata	
Net weight	1 pc(s)/st
Customs tariff number (Comb. Nomenclature EU)	85359000
GTIN	4013364124448
PU	10 st

We reserve the right to make changes to the design and technology, dimensions, weights and materials in the interests of technical progress. The illustrations are not binding.