
Fixed Earthing Terminals

EFPM M10 12 V4A MVK8.10 STTZN (478112)



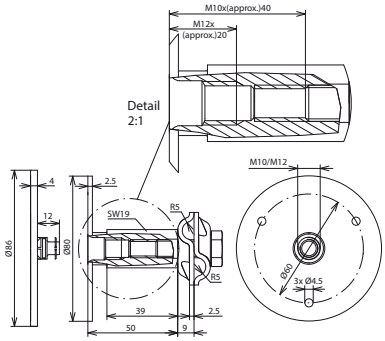

Dimension drawing

Type	EFPM M10 12 V4A MVK8.10 STTZN
Part No.	**478112**
Connection thread	M10 / M12
Material of plate	StSt (V4A)
Material No.	1.4571 / 1.4404 / 1.4401
ASTM / AISI	316Ti / 316L / 316
Material of MV clamp	**St/tZn**
Clamping range clamp Rd / Rd	8-10 mm
Minimum lengths of M10 screws	35 mm (thread length 40 mm)
Minimum lengths of M12 screws	15 mm (thread length 20 mm)
Type	with O-ring and MV clamp
Short-circuit current (AC 50 Hz / DC) (1 s; ≤ 300 °C)	9.3 kA
Lightning current carrying capability (10/350 µs)	I_{imp} 100 kA
Standard	EN 62561-1

Masterdata	
Net weight	1 pc(s)/st
Customs tariff number (Comb. Nomenclature EU)	85359000
GTIN	4013364118140
PU	25 st

We reserve the right to make changes to the design and technology, dimensions, weights and materials in the interests of technical progress. The illustrations are not binding.

© DEHN, Inc. • 500 S Main Street, Suite 115 • Mooresville, NC 28115 • United States • Tel. +1 877-927-6510 • contactDEHN@dehn.us • www.dehn.us

: Tested • NEU: New • !: Discontinued Model
: Cross connector • : Longitudinal connector • : Parallel connector • : T connector • : Clamp for parallel connector • : Clamp for T connector
: Pipe clamp for parallel connector • : Pipe clamp for T connector • : Equipotential bonding bar • : Bridging component