
Fixed Earthing Terminals

EFPK M10 12 V4A L230 STTZN (478200)



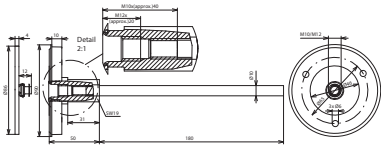

Dimension drawing

Type	EFPK M10 12 V4A L230 STTZN
Part No.	**478200**
Connection thread	M10 / M12
Material of plate	StSt (V4A)
Material No.	1.4571 / 1.4404 / 1.4401
ASTM / AISI	316Ti / 316L / 316
Material of shaft	**St/tZn**
Dimensions of connecting shaft (Ø / length)	10 / 180 mm
Minimum lengths of M10 screws	35 mm (thread length 40 mm)
Minimum lengths of M12 screws	15 mm (thread length 20 mm)
Short-circuit current (AC 50 Hz / DC) (1 s; ≤ 300 °C)	6.5 kA
Lightning current carrying capability (10/350 µs)	I_{imp} 100 kA
Standard	EN 62561-1

Masterdata	
Net weight	1 pc(s)/st
Customs tariff number (Comb. Nomenclature EU)	85359000
GTIN	4013364035652
PU	25 st

We reserve the right to make changes to the design and technology, dimensions, weights and materials in the interests of technical progress. The illustrations are not binding.

© DEHN, Inc. • 500 S Main Street, Suite 115 • Mooresville, NC 28115 • United States • Tel. +1 877-927-6510 • contactDEHN@dehn.us • www.dehn.us

: Tested • NEU: New • !: Discontinued Model
: Cross connector • : Longitudinal connector • : Parallel connector • : T connector • : Clamp for parallel connector • : Clamp for T connector
: Pipe clamp for parallel connector • : Pipe clamp for T connector • : Equipotential bonding bar • : Bridging component