

UKSV 6.10 AQ16 50 V4A (540 122)

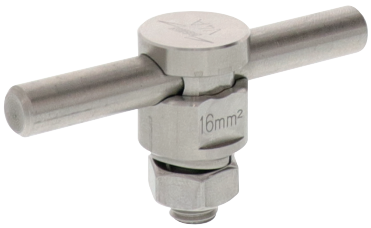

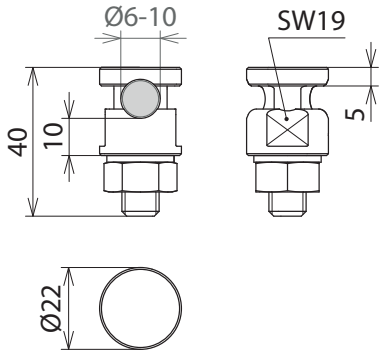

Dimension drawing

Universal clamping screw connector for the lightning-current-carrying connection of round conductors and also of solid / stranded conductors, e.g. to flat profiles, downpipe clamps as well as equipotential bonding bars.

Type	UKSV 6.10 AQ16 50 V4A
Part No.	**540 122**
Material of clamping screw	StSt (V4A)
Material of clamp	StSt (V4A)
Material of nut	StSt (V4A)
Material No.	1.4401
Clamping range Rd	6-10 mm
Connection (solid / stranded)	16-50 mm²
Type	+ spring washer
Screw	M10
Lightning current carrying capability (10/350 µs)	I_{imp} 100 kA / I_{imp} 50 kA *)
Standard	EN 62561-1
Short-circuit current (AC 50 Hz / DC) (1 s; ≤ 300 °C)	3.9 kA

Masterdata	
Net weight	63 g/pc(s)
GTIN	4013364379930
PU	1 pc(s)
Customs tariff number (Comb. Nomenclature EU)	85359000

We reserve the right to make changes to the design and technology, dimensions, weights and materials in the interests of technical progress. The illustrations are not binding.

*) For exact assignment, see test certificate.

© DEHN, Inc. • 500 S Main Street, Suite 115 • Mooresville, NC 28115 • United States • Tel. +1 877-927-6510 • contactDEHN@dehn.us • www.dehn.us

: Tested • NEU: New • : Discontinued Model
: Cross connector • : Longitudinal connector • : Parallel connector • : T connector • : Clamp for parallel connector • : Clamp for T connector
: Pipe clamp for parallel connector • : Pipe clamp for T connector • : Equipotential bonding bar • : Bridging component