

SPK 27.89 BRS AK1X10 2X6.8 GSG V2A (540 199)

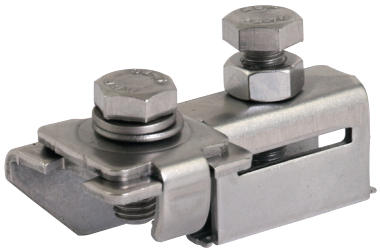

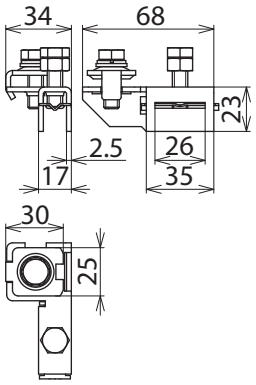

Dimension drawing

For combination with endless tensioning strap (Part No. 540 901), connection cross-section 4-50 mm² (solid / stranded).

Type	SPK 27.89 BRS AK1X10 2X6.8 GSG V2A
Part No.	**540 199**
Material	StSt
Screw	M8 x 20 mm
Screw material	StSt
Connection Rd	1 x 10 mm / 1-2 x 6-8 mm
Connection (solid / stranded)	4-50 mm²
Lightning current carrying capability (10/350 µs)	I_{imp} 100 kA *)
Standard	EN 62561-1

Masterdata	
Net weight	106.9 g/pc(s)
GTIN	4013364304741
PU	1 pc(s)
Customs tariff number (Comb. Nomenclature EU)	85359000

We reserve the right to make changes to the design and technology, dimensions, weights and materials in the interests of technical progress. The illustrations are not binding.

*) For exact assignment, see test certificate.