
UEK 8.10 AQ4 50 HKSBM10 V2A (540 262)



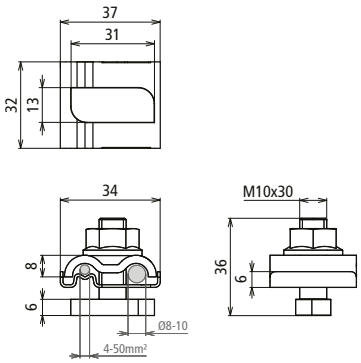

Dimension drawing

UNI earth clamp for incorporating parts of an installation in the functional equipotential bonding, lightning equipotential bonding or in the functional earthing. StSt type, with M10 (31/13) hammer-head bolt and self-locking nut with serrated bearing

The StSt contact plate (intermediate element) allows different conductor materials (Cu, Al, St/tZn and StSt) to be connected to the normal mounting systems, e.g. to aluminium, without the risk of contact corrosion.
The double clamp design allows easy and quick interconnection of the profiles, e.g. by feed-through wiring.

Type	UEK 8.10 AQ4 50 HKSBM10 V2A
Part No.	**540 262**
Material of clamp	StSt
Clamping range Rd	8-10 mm
Connection (solid / stranded)	4-50 mm²
Screw	Hammer-head bolt (31 x 13 mm), M10 x 30 mm
Self-locking nut	width across flats 15 mm
Material of screw / nut	StSt
Lightning current carrying capability (10/350 µs)	I_{imp} 100 kA / I_{imp} 50 kA *)
Standard	EN 62561-1

Masterdata	
Net weight	77.76 g/pc(s)
GTIN	4013364449237
PU	1 pc(s)
Customs tariff number (Comb. Nomenclature EU)	85359000

We reserve the right to make changes to the design and technology, dimensions, weights and materials in the interests of technical progress. The illustrations are not binding.

*) For exact assignment, see test certificate.