

Potential Control

UEK 8.10 AQ3/4 M8 V4A (540270)

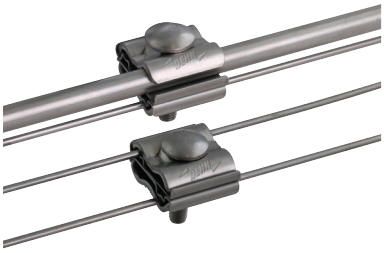

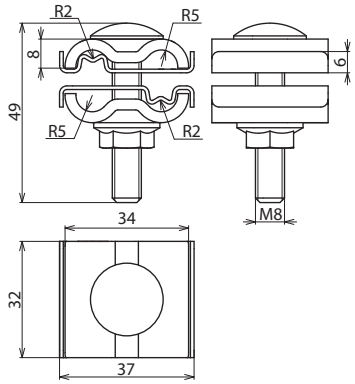

Dimension drawing

Clamp for interconnecting mesh mats or for connecting mesh mats with earth-termination systems.

Type	UEK 8.10 AQ3/4 M8 V4A
Part No.	**540270**
Material	StSt (V4A)
Material No.	1.4571 / 1.4404 / 1.4401
ASTM / AISI	316Ti / 316L / 316
Clamping range Rd / Rd	8-10 / 3-4 3-4 / 3-4 mm
Connection (solid / stranded)	4-50 mm²
Screw	M8 x 40 mm
Lightning impulse current carrying capability (10/350 µs)	25 kA
Standard	based on EN 62561-1

Masterdata	
Net weight	99.56 g/pc(s)
Customs tariff number (Comb. Nomenclature EU)	85359000
GTIN	4013364320536
PU	50 pc(s)

We reserve the right to make changes to the design and technology, dimensions, weights and materials in the interests of technical progress. The illustrations are not binding.

© DEHN (U.K.) LTD. • Unit 4 Velocity Point • Castleton Road • Armley • Leeds • LS12 2EE • United Kingdom • Tel. +44 113 541 8900 • info@dehn.co.uk • www.dehn.co.uk

: Tested • NEU: New • !: Discontinued Model
: Cross connector • : Longitudinal connector • : Parallel connector • : T connector • : Clamp for parallel connector • : Clamp for T connector
: Pipe clamp for parallel connector • : Pipe clamp for T connector • : Equipotential bonding bar • : Bridging component