
Potential Control

MMVK 3.5 8.10 SKM8X30 V4A (540271)



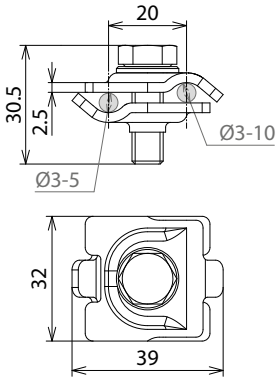

Dimension drawing

Type	**MMVK 3.5 8.10 SKM8X30 V4A**
Part No.	**540271**
Material	StSt (V4A)
Material No.	1.4571 / 1.4404 / 1.4401
ASTM / AISI	316Ti / 316L / 316
Clamping range Rd	3-10 mm
Connection (solid / stranded)	16 mm²
Screw	M8 x 30 mm
Lightning impulse current carrying capability (10/350 µs)	25 kA
Standard	based on EN 62561-1

Masterdata	
Net weight	50.24 g/pc(s)
Customs tariff number (Comb. Nomenclature EU)	85359000
GTIN	4013364385306
PU	50 pc(s)

We reserve the right to make changes to the design and technology, dimensions, weights and materials in the interests of technical progress. The illustrations are not binding.

© DEHN, Inc. • 500 S Main Street, Suite 115 • Mooresville, NC 28115 • United States • Tel. +1 877-927-6510 • contactDEHN@dehn.us • www.dehn.us

: Tested • NEU: New • !: Discontinued Model
: Cross connector • : Longitudinal connector • : Parallel connector • : T connector • : Clamp for parallel connector • : Clamp for T connector
: Pipe clamp for parallel connector • : Pipe clamp for T connector • : Equipotential bonding bar • : Bridging component