
EX BRS 90 (540 801)



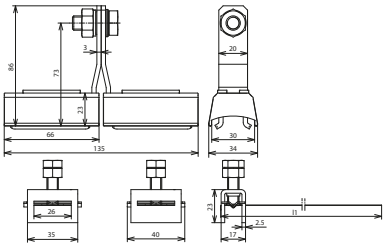

Dimension drawing

Type	EX BRS 90
Part No.	**540 801**
Lightning impulse current (10/350 µs) Cu (I_{imp})	50 kA
Lightning impulse current (10/350 µs) St/tZn (I_{imp})	50 kA
Lightning impulse current (10/350 µs) StSt (I_{imp})	25 kA
Class of lightning current carrying capability acc. to EN 62561-1	N
Connection	M10
Clamping range for pipe Ø	27-89 mm ($^3/_4$-3"")
Material of clamp body	**polyamide**
Material of grip head / strap	**StSt**
Material of contact piece	**Cu/gal Sn**
Dimensions of tensioning strap (l1 x b x t)	410 x 25 x 0.3 mm
Type	UV stabilised
Standard	EN 62561-1

Masterdata	
Net weight	503 g/pc(s)
GTIN	4013364115460
PU	1 pc(s)
Customs tariff number (Comb. Nomenclature EU)	85359000

We reserve the right to make changes to the design and technology, dimensions, weights and materials in the interests of technical progress. The illustrations are not binding.

With regard to corrosion resistance, it must be checked whether the materials used for the Ex pipe clamps, Ex BRS ... (e.g. Cu/galSn, brass/galSn, StSt, polyamide) can be used in the existing ambient conditions.