

EX BRS 500 (540 805)

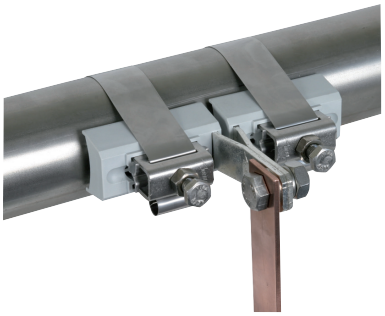

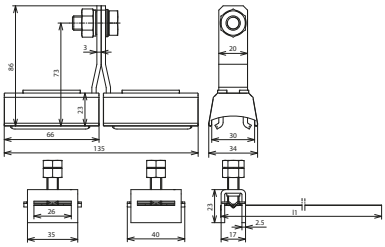

Dimension drawing

Type	EX BRS 500
Part No.	**540 805**
Lightning impulse current (10/350 µs) St/bare (I_{imp})	50 kA
Lightning impulse current (10/350 µs) StSt (I_{imp})	50 kA
Class of lightning current carrying capability acc. to EN 62561-1	N
Connection	M10
Clamping range for pipe Ø	300-500 mm
Material of clamp body	**polyamide**
Material of grip head / strap	**StSt**
Material of contact piece	**Cu/gal Sn**
Dimensions of tensioning strap (l1 x b x t)	1850 x 25 x 0.3 mm
Type	UV stabilised
Standard	EN 62561-1

Masterdata	
Net weight	766 g/pc(s)
GTIN	4013364128873
PU	1 pc(s)
Customs tariff number (Comb. Nomenclature EU)	85359000

We reserve the right to make changes to the design and technology, dimensions, weights and materials in the interests of technical progress. The illustrations are not binding.

With regard to corrosion resistance, it must be checked whether the materials used for the Ex pipe clamps, Ex BRS ... (e.g. Cu/galSn, brass/galSn, StSt, polyamide) can be used in the existing ambient conditions.

© DEHN, Inc. • 500 S Main Street, Suite 115 • Mooresville, NC 28115 • United States • Tel. +1 877-927-6510 • contactDEHN@dehn.us • www.dehn.us

: Tested • NEU: New • !: Discontinued Model
: Cross connector • : Longitudinal connector • : Parallel connector • : T connector • : Clamp for parallel connector • : Clamp for T connector
: Pipe clamp for parallel connector • : Pipe clamp for T connector • : Equipotential bonding bar • : Bridging component