

SPK 25 BRS AQ4 25 V2A (540 900)

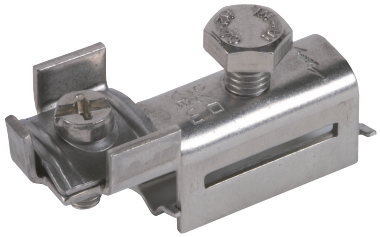

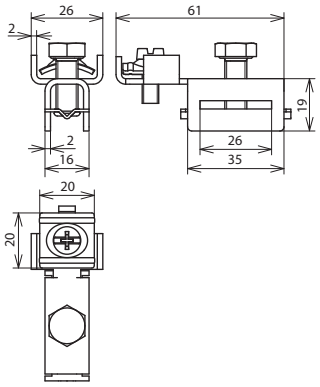

Dimension drawing

Type	SPK 25 BRS AQ4 25 V2A
Part No.	**540 900**
Type	without tensioning strap
Material	StSt
Screw	M8 x 20 / M6 x 16 mm
Screw material	StSt
Connection	4-25 mm²
Two-wire connection	yes
Feed-through wiring	yes
Lightning current carrying capability (10/350 µs)	I_{imp} 50 kA *)
Standard	EN 62561-1
Application note	suitable for outdoor use

Masterdata	
Net weight	55 g/pc(s)
GTIN	4013364076532
PU	1 pc(s)
Customs tariff number (Comb. Nomenclature EU)	85359000

We reserve the right to make changes to the design and technology, dimensions, weights and materials in the interests of technical progress. The illustrations are not binding.

*) For exact assignment, see test certificate.

© DEHN, Inc. • 500 S Main Street, Suite 115 • Mooresville, NC 28115 • United States • Tel. +1 877-927-6510 • contactDEHN@dehn.us • www.dehn.us

: Tested • NEU: New • !: Discontinued Model
: Cross connector • : Longitudinal connector • : Parallel connector • : T connector • : Clamp for parallel connector • : Clamp for T connector
: Pipe clamp for parallel connector • : Pipe clamp for T connector • : Equipotential bonding bar • : Bridging component