

BRS 27.60 AQ4 25 V2A (540 910)

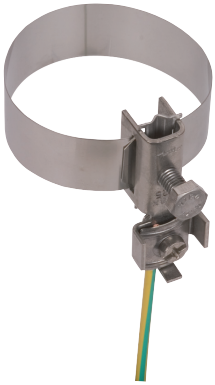

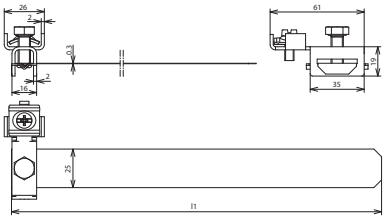

Dimension drawing

Type	BRS 27.60 AQ4 25 V2A
Part No.	**540 910**
Material	StSt
Clamping range for pipe Ø	27-60 mm ($^3/_4$-2“)
Screw	M8 x 20 / M6 x 16 mm
Screw material	StSt
Dimensions of strap (H1 x B x L)	240 x 25 x 0.3 mm
Connection (solid / stranded)	4-25 mm²
Two-wire connection	yes
Feed-through wiring	yes
Lightning current carrying capability (10/350 µs)	I_{imp} 50 kA *)
Standard	EN 62561-1
Application note	suitable for outdoor use

Masterdata	
Net weight	71.2 g/pc(s)
GTIN	4013364025684
PU	1 pc(s)
Customs tariff number (Comb. Nomenclature EU)	85359000

We reserve the right to make changes to the design and technology, dimensions, weights and materials in the interests of technical progress. The illustrations are not binding.

*) For exact assignment, see test certificate.

© DEHN, Inc. • 500 S Main Street, Suite 115 • Mooresville, NC 28115 • United States • Tel. +1 877-927-6510 • contactDEHN@dehn.us • www.dehn.us

: Tested • NEU: New • !: Discontinued Model
: Cross connector • : Longitudinal connector • : Parallel connector • : T connector • : Clamp for parallel connector • : Clamp for T connector
: Pipe clamp for parallel connector • : Pipe clamp for T connector • : Equipotential bonding bar • : Bridging component