

Equipotential Bonding Busbars R15 with Terminal Block System / Kit

PAS AH RK 7X25 2X8.10 1XFL30 (563010)

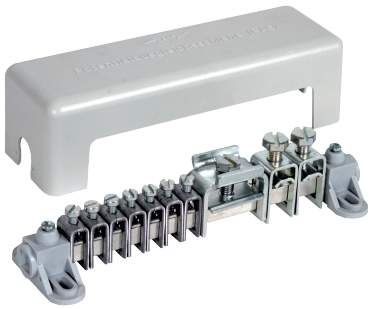

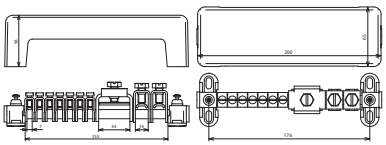

Dimension drawing

Type	PAS AH RK 7X25 2X8.10 1XFL30
Part No.	**563010**
Connection (solid / stranded)	7x 2,5-25 mm²
Connection Rd (solid / stranded / cable)	2x 8-10 mm or 16-95 mm²
Connection Fl	1x -30 x 4 mm
Clamping bar	**brass/gal Sn**
Cross section	100 mm²
Fixing	[4x] 6 x 12 mm
Lightning current carrying capability (10/350 µs)	I_{imp} 100 kA *)
Short-circuit current (50 Hz) (1 s; ≤ 300 °C)	9.2 kA *)
Continuous current test (25 A; ≤ 45 K)	passed *)
Standard	EN 62561-1

Masterdata	
Net weight	469.1 g/pc(s)
Customs tariff number (Comb. Nomenclature EU)	85359000
GTIN	4013364027800
PU	1 pc(s)

We reserve the right to make changes to the design and technology, dimensions, weights and materials in the interests of technical progress. The illustrations are not binding.

*) For exact assignment, see test certificate.