

Equipotential Bonding Busbars K12 with Snap-on Terminals

PAS 11AK (563200)

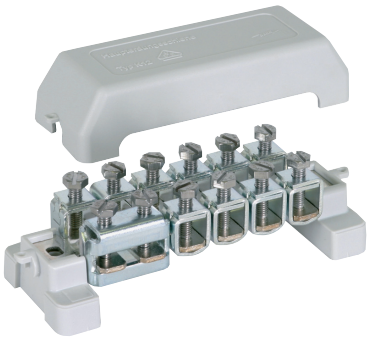

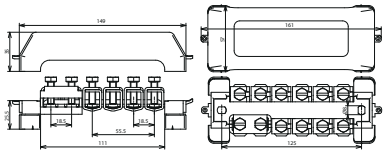

Dimension drawing

Type	PAS 11AK
Part No.	**563200**
Connection (solid / stranded / fine-stranded)	10 x 2,5-95 mm²
Connection Rd	or 10 x -10 mm
Connection Fl	1 x -30 x 4 mm
Material of cage clamp	**St/tZn**
Material of contact rail	**Cu/gal Sn**
Cross section	30 mm²
Fixing	[2x] 6 x 8 mm
Fixing frames	P (grey)
Cover	P (grey/sealable)
Lightning current carrying capability (10/350 µs)	I_{imp} 100 kA / I_{imp} 50 kA *)
Short-circuit current (50 Hz) (1 s; ≤ 300 °C)	8.1 kA *)
Continuous current test (25 A; ≤ 45 K)	passed *)
Standard	EN 62561-1
Type	halogen-free

Masterdata	
Net weight	1 pc(s)/st
Customs tariff number (Comb. Nomenclature EU)	85359000
GTIN	4013364056558
PU	1 st

We reserve the right to make changes to the design and technology, dimensions, weights and materials in the interests of technical progress. The illustrations are not binding.

*) For exact assignment, see test certificate.