
AS S TE 20 7.10 FL40 V4A (620 915)



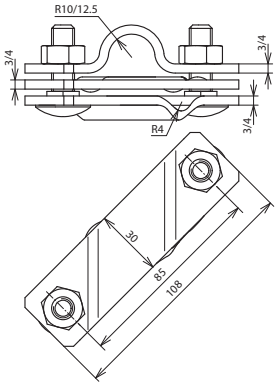

Dimension drawing

Type	AS S TE 20 7.10 FL40 V4A
Part No.	**620 915**
Material	StSt (V4A)
Clamping range Rd / Fl	7-10 / -40 mm
Clamping range (stranded / cable)	35-120 mm²
Rod diameter	Ø20 mm
Screw	M10 x 35 mm
Material of screw / nut	StSt (V4A)
Material No.	1.4571 / 1.4404 / 1.4401
Lightning current carrying capability (10/350 µs)	I_{imp} 100 kA *)
Standard	EN 62561-1
Short-circuit current (AC 50 Hz / DC) (1 s; ≤ 300 °C)	7.3 kA

Masterdata	
Net weight	298 g/pc(s)
GTIN	4013364026629
PU	1 pc(s)
Customs tariff number (Comb. Nomenclature EU)	85359000

We reserve the right to make changes to the design and technology, dimensions, weights and materials in the interests of technical progress. The illustrations are not binding.

*) For exact assignment, see test certificate.

© DEHN, Inc. • 500 S Main Street, Suite 115 • Mooresville, NC 28115 • United States • Tel. +1 877-927-6510 • contactDEHN@dehn.us • www.dehn.us

: Tested • NEU: New • !: Discontinued Model
: Cross connector • : Longitudinal connector • : Parallel connector • : T connector • : Clamp for parallel connector • : Clamp for T connector
: Pipe clamp for parallel connector • : Pipe clamp for T connector • : Equipotential bonding bar • : Bridging component