
AS TE 20 320 M16 STTZN (621 092)



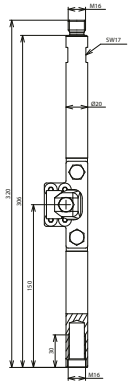

Dimension drawing

NEW

Type	AS TE 20 320 M16 STTZN
Part No.	**621 092**
Material	**HDG steel / StSt**
Rod length (l1)	320 mm
Earth electrode diameter	20 mm
Thread	M16
Connection	4x M6 x 10 mm ✪TX30 (4x 2.5 mm² – max. 16 mm²) or 1x M8 x 20 mm ⬢AF13 (Ø6–10 mm)
Lightning current carrying capability (10/350 µs) (I_{imp})	100 kA
Short-circuit current (AC 50 Hz / DC) (0.2 s; ≤ 300 °C)	5.3 kA (35 mm², stranded)
Max. continuous current load T_{max}=100 °C (VDE 0101-2)	125 A
Standard	DIN EN 62561-1

Masterdata	
Net weight	778 g/pc(s)
GTIN	4013364501140
PU	1 pc(s)
Customs tariff number (Comb. Nomenclature EU)	85389099

We reserve the right to make changes to the design and technology, dimensions, weights and materials in the interests of technical progress. The illustrations are not binding.