
VM EASY 5 TE M16 (621 093)



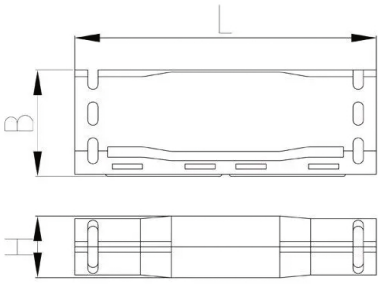

Dimension drawing

Gel connecting sleeve for screwable earth rod for permanent protection of the connecting cables of connector (part no. 621 092) and connection clamp (part no. 621 094) against the ingress of water or moisture.

NEW

Type	VM EASY 5 TE M16
Part No.	**621 093**
Properties	Connector area is completely sealed with gel. Accessible again immediately ready for operation. Flame-retardant, UV-resistant and impact-resistant moulded plastic shell. Quick, easy and secure installation.
Application	Soil/water (as per test standard) / indoor (installation in buildings and on cable ladders) / outdoor
Voltage levels	U_0/U (U_m) 0.6/1 (1.2) kV
Outer diameter (l x b x h)	240 x 75 x 44 mm
Inside dimensions (l x b x h)	approx. 130 x 45 x 34 mm
Cable diameter	19-28 mm
Degree of protection	IP 68
Installation temperature	-20 to 90 °C
Durability	Can be stored indefinitely
Delivery includes	Gel connecting sleeve, spacer, cable tie, installation instructions
Standard	Type-tested acc. to EN 50393

Masterdata	
Net weight	529.35 g/pc(s)
GTIN	4013364502383
PU	1 pc(s)
Customs tariff number (Comb. Nomenclature EU)	85369010

We reserve the right to make changes to the design and technology, dimensions, weights and materials in the interests of technical progress. The illustrations are not binding.

© DEHN, Inc. • 500 S Main Street, Suite 115 • Mooresville, NC 28115 • United States • Tel. +1 877-927-6510 • contactDEHN@dehn.us • www.dehn.us

: Tested • NEW: New • : Discontinued Model
: Cross connector • : Longitudinal connector • : Parallel connector • : T connector • : Clamp for parallel connector • : Clamp for T connector
: Pipe clamp for parallel connector • : Pipe clamp for T connector • : Equipotential bonding bar • : Bridging component