
TE 20 3000 M16 STTZN (621 300)



NEW

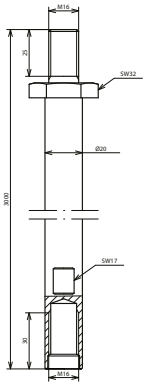

Dimension drawing

Type	TE 20 3000 M16 STTZN
Part No.	**621 300**
Material	**HDG steel**
Rod length (l1)	3000 mm
Earth electrode diameter	20 mm
Thread	M16
Hot-dip galvanisation - single value:	~ 63 µm
Hot-dip galvanisation - average value:	≥ 70 µm
Tensile strength	approx. 560 N/mm²
Specific conductance	≤ 6.66 m / Ohm mm²
Specific resistance	≤ 0.15 Ohm mm² / m
Lightning current carrying capability (10/350 µs) (I_{imp})	100 kA
Short-circuit current (AC 50 Hz / DC) (1 s; ≤ 300 °C)	7.4 kA
Standard	DIN EN 62561-2

Masterdata	
Net weight	7.66 kg/pc(s)
GTIN	4013364499089
PU	1 pc(s)
Customs tariff number (Comb. Nomenclature EU)	85389099

We reserve the right to make changes to the design and technology, dimensions, weights and materials in the interests of technical progress. The illustrations are not binding.

© DEHN, Inc. • 500 S Main Street, Suite 115 • Mooresville, NC 28115 • United States • Tel. +1 877-927-6510 • contactDEHN@dehn.us • www.dehn.us

: Tested • NEW: New • : Discontinued Model
: Cross connector • : Longitudinal connector • : Parallel connector • : T connector • : Clamp for parallel connector • : Clamp for T connector
: Pipe clamp for parallel connector • : Pipe clamp for T connector • : Equipotential bonding bar • : Bridging component