
KFP 20 W45 M12 (706 200)

- Female thread (not cut)



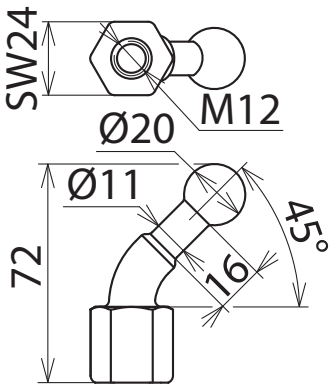

Dimension drawing

Type	KFP 20 W45 M12
Part No.	**706 200**
Fixed ball point Ø	20 mm
Dimensions	M12
width across flats	24 mm
Max. cable cross-section Cu	70 mm²
Max. short-circuit current I_k 0.5 s	19.5 kA
Max. short-circuit current I_k 1 s	13.8 kA
Standard	EN/IEC 61230 (DIN VDE 0683-100) and based on DIN 48088-1
Material (fixed point)	**E-Cu/gal Sn**
Material (threaded pin)	**StSt A2-70**
Hexagon nut	DIN 985-M12-8 / gal Zn; DIN 985-M16-8 / gal Zn

Masterdata	
Net weight	172.4 g/pc(s)
GTIN	4013364004276
PU	1 pc(s)
Customs tariff number (Comb. Nomenclature EU)	85359000

We reserve the right to make changes to the design and technology, dimensions, weights and materials in the interests of technical progress. The illustrations are not binding.

© DEHN, Inc. • 500 S Main Street, Suite 115 • Mooresville, NC 28115 • United States • Tel. +1 877-927-6510 • contactDEHN@dehn.us • www.dehn.us

: Tested • NEU: New • !: Discontinued Model
: Cross connector • : Longitudinal connector • : Parallel connector • : T connector • : Clamp for parallel connector • : Clamp for T connector
: Pipe clamp for parallel connector • : Pipe clamp for T connector • : Equipotential bonding bar • : Bridging component