
RBK 30 SQ SN7642 (715 313)

- Earthing and short-circuiting devices can be configured online via the earthing and short-circuiting configurator



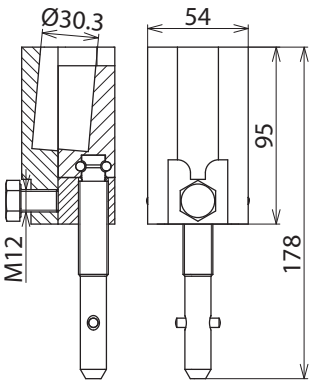

Dimension drawing

Type	RBK 30 SQ SN7642
Part No.	**715 313**
For round pins Ø	30 mm
Terminal lug material	**Cualloy / gal Sn**
Material (shaft)	**Copper alloy/gal Sn**
Pressure plate material	**Copper alloy/gal Sn**
Anti-rotation protection	PK1
For cable cross section Cu	16 … 150 mm²
Max. short-circuit current I_k 0.5 s	42.0 kA
Max. short-circuit current I_k 1 s	29.6 kA
Standard	EN/IEC 61230 (DIN VDE 0683-100), threaded T pin shaft DIN 48087
Temperature range	–25 °C … +55 °C
Material (clamp body)	**Copper alloy/gal Sn**

Masterdata	
Net weight	1.55 kg/pc(s)
GTIN	4013364154971
PU	1 pc(s)
Customs tariff number (Comb. Nomenclature EU)	85359000

We reserve the right to make changes to the design and technology, dimensions, weights and materials in the interests of technical progress. The illustrations are not binding.

The clamps must have the same maximum short-circuit current as the earthing and short-circuiting cables!