
MA SDS M12 (723 199)



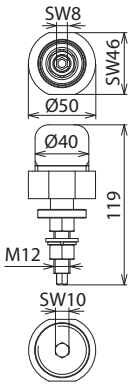

Dimension drawing

For mounting on the mast support profile of a contact wire mast with Fl 8–12 mm.

Type	MA SDS M12
Part No.	**723 199**
Lightning current carrying capability (10/350 µs)	25 kA
Additional short-circuit current rating	21 kA_{rms} / 30 ms
Long-term current	1 kA_{rms} at t ≤ 120 s
Leakage current (I_{PE})	< 1 µA at 100 V d.c.
Material	**Brass**
Degree of protection of the inner enclosure	IP 67
Dimensions of the threaded pin	M12

Masterdata	
Net weight	750 g/pc(s)
GTIN	4013364151703
PU	1 pc(s)
Customs tariff number (Comb. Nomenclature EU)	85359000

We reserve the right to make changes to the design and technology, dimensions, weights and materials in the interests of technical progress. The illustrations are not binding.