
KFP 25 RL 14 (725 014)



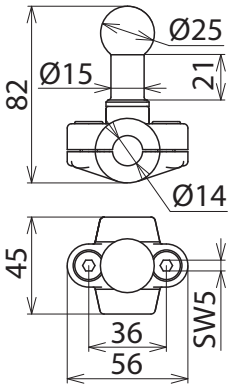

Dimension drawing

Type	KFP 25 RL 14
Part No.	**725 014**
Fixed ball point Ø	25 mm
For round conductor Ød	14 mm
Max. cable cross-section Cu	95 mm²
Max. short-circuit current I_k 0.5 s	26.5 kA
Max. short-circuit current I_k 1 s	18.7 kA
Standard	EN/IEC 61230 (DIN VDE 0683-100)
Material (fixed point)	**E-Cu/gal Sn**
Material (threaded pin)	**StSt A2-70**
Hexagon nut	DIN 985-M12-8 / gal Zn; DIN 985-M16-8 / gal Zn
Material (round conductor half-finished parts)	**Copper alloy/gal Sn**
Screw	Hexagon socket-head bolt
Screw material	**Stainless steel**

Masterdata	
Net weight	385 g/pc(s)
GTIN	4013364003774
PU	1 pc(s)
Customs tariff number (Comb. Nomenclature EU)	85359000

We reserve the right to make changes to the design and technology, dimensions, weights and materials in the interests of technical progress. The illustrations are not binding.

© DEHN, Inc. • 500 S Main Street, Suite 115 • Mooresville, NC 28115 • United States • Tel. +1 877-927-6510 • contactDEHN@dehn.us • www.dehn.us

: Tested • NEU: New • !: Discontinued Model
: Cross connector • : Longitudinal connector • : Parallel connector • : T connector • : Clamp for parallel connector • : Clamp for T connector
: Pipe clamp for parallel connector • : Pipe clamp for T connector • : Equipotential bonding bar • : Bridging component