

PAP 3 M12 SSM B13 RB (728 313)

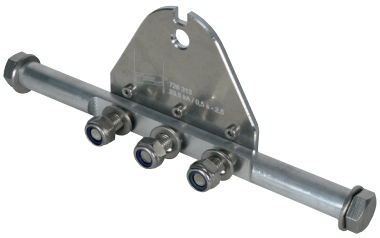

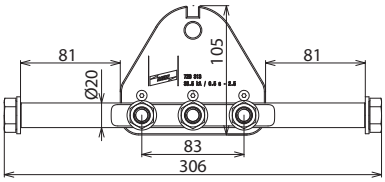

Dimension drawing

Phase connecting plate, three-pole with round pin.

Type	**PAP 3 M12 SSM B13 RB**
Part No.	**728 313**
Anti-rotation protection	PK1
Max. short-circuit current I_k 0.5 s	33.5 kA
Max. short-circuit current I_k 1 s	23.7 kA
Standard	DIN VDE 0683-100 (EN/IEC 61230), threaded T pin shaft DIN 48087
Temperature range	–25 °C … +55 °C
Pressure plate material	**Al**alloy
Material (clamp body)	**Al**alloy
Material (shaft)	**Cu**alloy / gal Sn or StSt
Material (coupling aid)	St/gal Zn

Masterdata	
Net weight	612 g/pc(s)
GTIN	4013364157132
PU	1 pc(s)
Customs tariff number (Comb. Nomenclature EU)	85359000

We reserve the right to make changes to the design and technology, dimensions, weights and materials in the interests of technical progress. The illustrations are not binding.

The clamps must be designed for the same maximum short-circuit current as the earthing and short-circuiting cables!