

KK TA 0 24 SK10 (745 503)

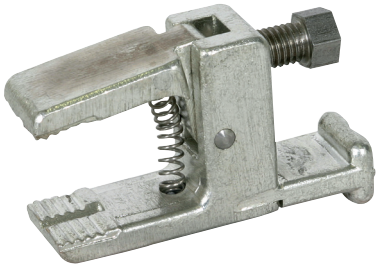

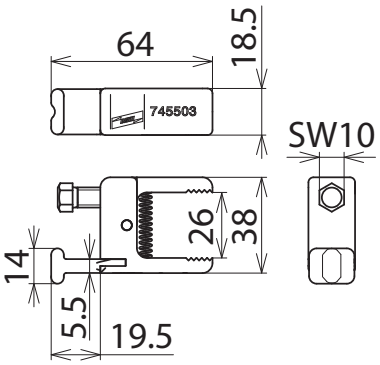

Dimension drawing

With T connection and hexagon locking screw (WS 10) for use with earthing handle VI and fixing via adjustable handle with flexible shaft.

Type	**KK TA 0 24 SK10**
Part No.	**745 503**
Clamping range	Up to 24 mm
Max. short-circuit current I_k 0.5 s	10.0 kA
Max. short-circuit current I_k 1 s	6.9 kA
Dimensions	65 x 18 x 36 mm

Masterdata	
Net weight	154 g/pc(s)
GTIN	4013364133570
PU	1 pc(s)
Customs tariff number (Comb. Nomenclature EU)	85359000

We reserve the right to make changes to the design and technology, dimensions, weights and materials in the interests of technical progress. The illustrations are not binding.