

KK M8 0 24 SK 10 (745 508)

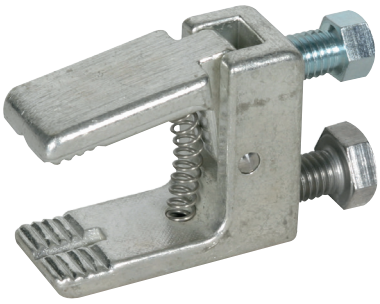

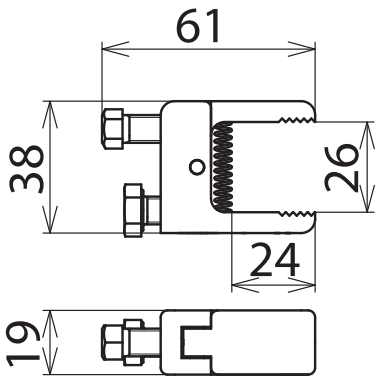

Dimension drawing

With threaded bolt M8 x 12 mm and hexagon locking screw (A/F10).
Fixed by means of an adjustable handle with flexible shaft.

Type	**KK M8 0 24 SK 10**
Part No.	**745 508**
Clamping range	Up to 24 mm
Max. short-circuit current I_k 0.5 s	10.0 kA
Max. short-circuit current I_k 1 s	6.9 kA

Masterdata	
Net weight	137 g/pc(s)
GTIN	4013364149366
PU	1 pc(s)
Customs tariff number (Comb. Nomenclature EU)	85359000

We reserve the right to make changes to the design and technology, dimensions, weights and materials in the interests of technical progress. The illustrations are not binding.