
KFP 20 M10 (754 205)

- Female thread (not cut)



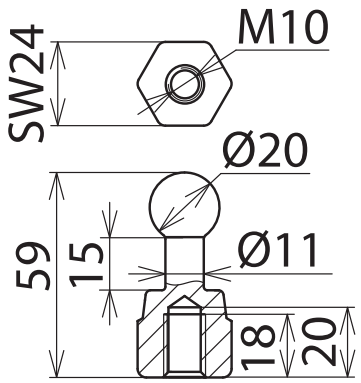

Dimension drawing

Type	KFP 20 M10
Part No.	**754 205**
Fixed ball point Ø	20 mm
Dimensions	M10
width across flats	24 mm
Max. cable cross-section Cu	120 mm²
Max. short-circuit current I_k 0.5 s	33.5 kA
Max. short-circuit current I_k 1 s	23.7 kA
Standard	EN/IEC 61230 (DIN VDE 0683-100) and based on DIN 48088-1
Material (fixed point)	**E-Cu/gal Sn**
Material (threaded pin)	**StSt A2-70**
Hexagon nut	DIN 985-M12-8 / gal Zn; DIN 985-M16-8 / gal Zn

Masterdata	
Net weight	136.6 g/pc(s)
GTIN	4013364097865
PU	1 pc(s)
Customs tariff number (Comb. Nomenclature EU)	85359000

We reserve the right to make changes to the design and technology, dimensions, weights and materials in the interests of technical progress. The illustrations are not binding.