
KFP 20 M16 45 SSM (754 645)

- With threaded pin and self-locking nut



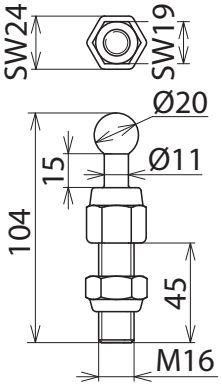

Dimension drawing

Type	KFP 20 M16 45 SSM
Part No.	**754 645**
Fixed ball point Ø	20 mm
Dimensions	M16 x 45 mm
width across flats	24 mm
Max. cable cross-section Cu	120 mm²
Max. short-circuit current I_k 0.5 s	33.5 kA
Max. short-circuit current I_k 1 s	23.7 kA
Standard	EN/IEC 61230 (DIN VDE 0683-100) and based on DIN 48088-1
Material (fixed point)	**E-Cu/gal Sn**
Material (threaded pin)	**StSt A2-70**
Hexagon nut	DIN 985-M16-8 / gal Zn
Tightening torque	100 ... 110 nm

Masterdata	
Net weight	286.8 g/pc(s)
GTIN	4013364004238
PU	1 pc(s)
Customs tariff number (Comb. Nomenclature EU)	85359000

We reserve the right to make changes to the design and technology, dimensions, weights and materials in the interests of technical progress. The illustrations are not binding.