
KFP 25 W90 M12 45SSM (757 245)

- With threaded pin and self-locking nut



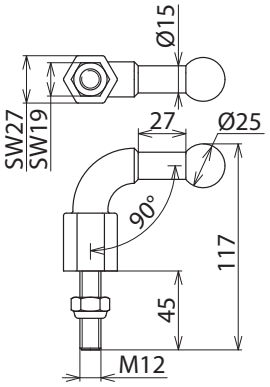

Dimension drawing

Type	KFP 25 W90 M12 45SSM
Part No.	**757 245**
Fixed ball point Ø	25 mm
Dimensions	M12 x 45 mm
width across flats	27 mm
Max. cable cross-section Cu	95 mm²
Max. short-circuit current I_k 0.5 s	26.5 kA
Max. short-circuit current I_k 1 s	18.7 kA
Standard	EN/IEC 61230 (DIN VDE 0683-100) and based on DIN 48088-1
Material (fixed point)	**E-Cu/gal Sn**
Material (threaded pin)	**StSt A2-70**
Hexagon nut	DIN 985-M12-8 / gal Zn
Tightening torque	50 ... 65 nm

Masterdata	
Net weight	454.4 g/pc(s)
GTIN	4013364004429
PU	1 pc(s)
Customs tariff number (Comb. Nomenclature EU)	85359000

We reserve the right to make changes to the design and technology, dimensions, weights and materials in the interests of technical progress. The illustrations are not binding.

© DEHN, Inc. • 500 S Main Street, Suite 115 • Mooresville, NC 28115 • United States • Tel. +1 877-927-6510 • contactDEHN@dehn.us • www.dehn.us

: Tested • NEU: New • : Discontinued Model
: Cross connector • : Longitudinal connector • : Parallel connector • : T connector • : Clamp for parallel connector • : Clamp for T connector
: Pipe clamp for parallel connector • : Pipe clamp for T connector • : Equipotential bonding bar • : Bridging component