
RST 36 1000 (766 040)



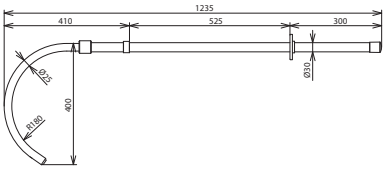

Dimension drawing

For rescuing persons from the live working zone in the event of an electrical accident

Type	**RST 36 1000**
Part No.	**766 040**
Nominal voltage (U_N)	1 ... 36 kV
Max. weight of the electrified victim	100 kg
Total length (l_G)	1235 mm
Insertion depth (I_O)	410 mm
Length (handle) (I_H)	300 mm
Standard	Based on DIN VDE V 0681-1
For use at	✷
Material (hook)	**PVC-HI solid stick**
Material (insulating tube)	**Glass-fibre reinforced polyester tube**
For	Indoor and outdoor installations
Diameter	30 mm
Anti-rotation plug-in coupling including end fitting	No
Type of device	Rescue rod

Masterdata	
Net weight	0.82 kg/pc(s)
GTIN	4013364113046
PU	1 pc(s)
Customs tariff number (Comb. Nomenclature EU)	82055980

We reserve the right to make changes to the design and technology, dimensions, weights and materials in the interests of technical progress. The illustrations are not binding.

© DEHN, Inc. • 500 S Main Street, Suite 115 • Mooresville, NC 28115 • United States • Tel. +1 877-927-6510 • contactDEHN@dehn.us • www.dehn.us

: Tested • NEU: New • !: Discontinued Model
: Cross connector • : Longitudinal connector • : Parallel connector • : T connector • : Clamp for parallel connector • : Clamp for T connector
: Pipe clamp for parallel connector • : Pipe clamp for T connector • : Equipotential bonding bar • : Bridging component