
# RST 36 1500 (766 041)



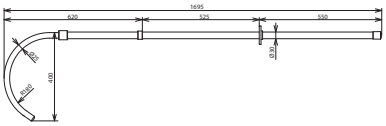


Dimension drawing

For rescuing persons from the live working zone in the event of an electrical accident

| **Type** | **RST 36 1500** |
|---|---|
| **Part No.** | **766 041** |
| Nominal voltage ($U_N$) | 1 ... 36 kV |
| Max. weight of the electrified victim | 100 kg |
| Total length ($l_G$) | 1695 mm |
| Insertion depth ($I_O$) | 620 mm |
| Length (handle) ($I_H$) | 550 mm |
| Standard | Based on DIN VDE V 0681-1 |
| For use at | ✷ |
| Material (hook) | **PVC-HI solid stick** |
| Material (insulating tube) | **Glass-fibre reinforced polyester tube** |
| For | Indoor and outdoor installations |
| Diameter | 30 mm |
| Anti-rotation plug-in coupling including end fitting | No |
| Type of device | Rescue rod |

| **Masterdata** | |
|---|---|
| Net weight | 1.02 kg/pc(s) |
| GTIN | 4013364113053 |
| PU | 1 pc(s) |
| Customs tariff number (Comb. Nomenclature EU) | 82055980 |

We reserve the right to make changes to the design and technology, dimensions, weights and materials in the interests of technical progress. The illustrations are not binding.

© DEHN, Inc. • 500 S Main Street, Suite 115 • Mooresville, NC 28115 • United States • Tel. +1 877-927-6510 • contactDEHN@dehn.us • www.dehn.us

: Tested • NEU: New • !: Discontinued Model
: Cross connector • : Longitudinal connector • : Parallel connector • : T connector • : Clamp for parallel connector • : Clamp for T connector
: Pipe clamp for parallel connector • : Pipe clamp for T connector • : Equipotential bonding bar • : Bridging component