
# Insulating Sticks with Universal Coupling for PHE III Indicator with Test Prod

## IS ZK STK 670 (766368)



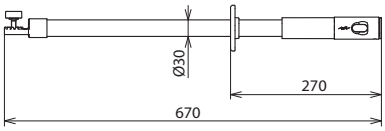


Dimension drawing

| Type | IS ZK STK 670 |
|---|---|
| **Part No.** | **766368** |
| Length (handle) ($I_{H\,min}$) | 265 mm |
| Standard | DIN VDE 0682 Part 411 (EN/IEC 61243-1) |
| Standard (universal gear coupling) | EN/IEC 60832 (DIN VDE 0682 Part 211) |
| For use in wet weather conditions | Yes |
| For | Indoor and outdoor switchgear installations |
| Type | Telescopic insulating stick up to 10.6 m |
| Material (telescopic insulating stick) | Glass-fibre reinforced epoxy resin tube |
| Insulating stick material | Glass-fibre reinforced polyester tube |
| Diameter | 30 mm |
| Anti-rotation plug-in coupling including end fitting | Yes |
| Type of device | Insulating stick |

| **Masterdata** | |
|---|---|
| Net weight | 340 g/pc(s) |
| Customs tariff number (Comb. Nomenclature EU) | 82055980 |
| GTIN | 4013364115026 |
| PU | 1 pc(s) |

We reserve the right to make changes to the design and technology, dimensions, weights and materials in the interests of technical progress. The illustrations are not binding.

© DEHN, Inc. • 500 S Main Street, Suite 115 • Mooresville, NC 28115 • United States • Tel. +1 877-927-6510 • contactDEHN@dehn.us • www.dehn.us

: Tested • NEU: New • : Discontinued Model
: Cross connector • : Longitudinal connector • : Parallel connector • : T connector • : Clamp for parallel connector • : Clamp for T connector
: Pipe clamp for parallel connector • : Pipe clamp for T connector • : Equipotential bonding bar • : Bridging component