
HSA194 110 420 STK (767 541)

- In a suiting transport case



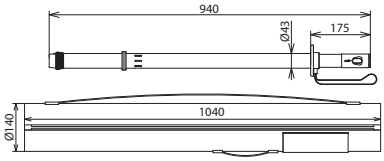

Dimension drawing

For contactlessly verifying that high-voltage overhead lines are dead.

Type	**HSA194 110 420 STK**
Part No.	**767 541**
Nominal voltage range (U_N)	110 ... 420 kV
Type of voltage	a.c.
Frequency	50 Hz
Total length (l_G)	940 mm
Insulating clearance (l_I)	540 mm
Temperature range	–25 °C ... +55 °C, climatic category N
For use at	
For	Overhead lines and outdoor switching stations
Application	Overhead lines
Type	Single-pole
Indication	Acoustic and visual
Self-testing element	Yes
Insulating stick material	**Glass-fibre reinforced polyester tube**
Verification while climbing the tower	No

Masterdata	
Net weight	1.2 kg/pc(s)
GTIN	4013364115712
PU	1 pc(s)
Customs tariff number (Comb. Nomenclature EU)	90303370

We reserve the right to make changes to the design and technology, dimensions, weights and materials in the interests of technical progress. The illustrations are not binding.

© DEHN, Inc. • 500 S Main Street, Suite 115 • Mooresville, NC 28115 • United States • Tel. +1 877-927-6510 • contactDEHN@dehn.us • www.dehn.us

: Tested • NEU: New • !: Discontinued Model
: Cross connector • : Longitudinal connector • : Parallel connector • : T connector • : Clamp for parallel connector • : Clamp for T connector
: Pipe clamp for parallel connector • : Pipe clamp for T connector • : Equipotential bonding bar • : Bridging component