
PHEG1 S P SN7240 (767 636)

- Earth clamp with adjustable handle
- Insulating stick with plug-in coupling as end fitting for extending the handle
- Easy transport due to detachable insulating stick



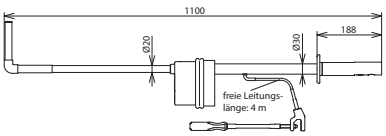

Dimension drawing

Type	PHEG1 S P SN7240
Part No.	**767 636**
Response voltage (U_T)	60 V
Nominal voltage (U_N)	3.8 kV
Type of voltage	d.c.
Length (indicator with test prod) (l_5)	615 mm
Length (insulating stick) (l_1)	550 mm
Length (earthing cable)	4000 mm
Total length (l_G)	1100 mm
Standard	Based on EN/IEC 61243-2 (DIN VDE 0682-412)
Temperature range	–25 °C ... +55 °C, climatic category N
For use at	
For	Indoor and outdoor installations
Application	Switchgear installations
Type	Two-pole
Indication	Indoor and outdoor installations, for example d.c. voltage systems (electrified rail networks, d.c. links)
Self-testing element	Yes
Material (test electrode)	**Copper alloy/gal Sn**
Material (test prod)	**Glass-fibre reinforced polyester tube**
Material (indicator)	**Plastic, fully insulated**
Insulating stick material	**Glass-fibre reinforced polyester tube**
Material (connecting cable)	**Highly flexible copper cable**

Masterdata	
Net weight	2.31 kg/pc(s)
GTIN	4013364155886
PU	1 pc(s)
Customs tariff number (Comb. Nomenclature EU)	90303370

We reserve the right to make changes to the design and technology, dimensions, weights and materials in the interests of technical progress. The illustrations are not binding.