
PHEG2 P SN7759 (767 661)



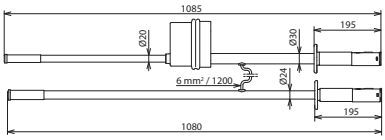

Dimension drawing

PHE/G II for switchgear installations.

Type	**PHEG2 P SN7759**
Part No.	**767 661**
Response voltage (U_T)	120 V
Special function	with AC suppression*)
Nominal voltage (U_N)	1 ... 12 kV
Type of voltage	d.c.
Length (indicator with test prod) (l_5)	600 mm
Length (insulating stick) (l_1)	550 mm
Length (connecting cable)	1200 mm
Total length (l_G)	1085 mm
Standard	Based on EN/IEC 61243-1 (DIN VDE 0682-411)
Temperature range	–25 °C ... +55 °C, climatic category N
For use at	
For	Indoor and outdoor installations
Application	Switchgear installations
Type	Two-pole
Indication	Visual
Self-testing element	Yes
Material (test electrode)	**Copper alloy/gal Sn**
Material (test prod)	**Glass-fibre reinforced polyester tube**
Material (indicator)	**Plastic, fully insulated**
Insulating stick material	**Glass-fibre reinforced polyester tube**
Material (connecting cable)	**Highly flexible copper cable**

Masterdata	
Net weight	3.5 kg/pc(s)
GTIN	4013364535558
PU	1 pc(s)
Customs tariff number (Comb. Nomenclature EU)	90303370

We reserve the right to make changes to the design and technology, dimensions, weights and materials in the interests of technical progress. The illustrations are not binding.

*) PHE/G II with AC suppression for clear indication in DC voltage systems with coupled AC voltages.