
PHEG1.S P SN7401 (767 666)

- Earth clamp with adjustable handle and magnet
- Insulating stick with plug-in coupling as end fitting for extending the handle
- Easy transport due to detachable insulating stick



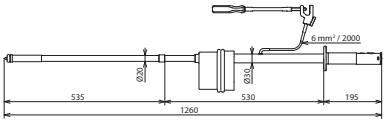

Dimension drawing

Type	PHEG1.S P SN7401
Part No.	**767 666**
Response voltage (U_r)	120 V
Nominal voltage (U_N)	1 ... 24 kV
Type of voltage	d.c.
Length (indicator with test prod) (I_s)	765 mm
Length (insulating stick) (l_1)	550 mm
Length (earthing cable)	2000 mm
Total length (l_G)	1260 mm
Insertion depth (I_O)	535 mm
Earth clamp	With magnet
Standard	Based on EN/IEC 61243-1 (DIN VDE 0682-411)
Temperature range	–25 °C ... +55 °C, climatic category N
For use at	
For	Indoor and outdoor installations
Application	Switchgear installations
Type	Two-pole
Indication	Indoor and outdoor installations, for example d.c. voltage systems (electrified rail networks, d.c. links)
Self-testing element	Yes
Material (test electrode)	**Copper alloy/gal Sn**
Material (test prod)	**Glass-fibre reinforced polyester tube**
Material (indicator)	**Plastic, fully insulated**
Insulating stick material	**Glass-fibre reinforced polyester tube**
Material (connecting cable)	**Highly flexible copper cable**

Masterdata	
Net weight	2.2 kg/pc(s)
GTIN	4013364157071
PU	1 pc(s)
Customs tariff number (Comb. Nomenclature EU)	90303370

We reserve the right to make changes to the design and technology, dimensions, weights and materials in the interests of technical progress. The illustrations are not binding.

© DEHN, Inc. • 500 S Main Street, Suite 115 • Mooresville, NC 28115 • United States • Tel. +1 877-927-6510 • contactDEHN@dehn.us • www.dehn.us

: Tested • NEU: New • !: Discontinued Model
: Cross connector • : Longitudinal connector • : Parallel connector • : T connector • : Clamp for parallel connector • : Clamp for T connector
: Pipe clamp for parallel connector • : Pipe clamp for T connector • : Equipotential bonding bar • : Bridging component